

이 제품은 다양한 환경에서 사용할 수 있도록 설계된 고성능 제품입니다. M200

길이 200-150 mm, 폭 65mm, 두께 4mm 이하 (4 ≤ mil)

무게 30g 이하, 작동 온도 범위 0°C ~ 60°C, 습도 5% ~ 95% (결로 없음)

지원 코딩: EAN128, Code39, MSI, Code11, Code39, Code128, Codabar, Code93, 2D 바코드 (QR, Data Matrix)

주요 사양: 100 times/s, 정확도 ±0.5%, ±0.2%, ±0.1%

연결 인터페이스: USB, RS232, RS485, 직경 22.4 x 50 x 70.3 mm, 무게 51g

전력 사양: Max.Power, DC5V, Max.Curren 95ma, 93ma, 47ma, 450ma

케이블 길이: line(1.5m), line(0.8m), USB, Line(1.8m) RS232

구성: 1 Piece, 작동 온도 0 ~ 60°C, 습도 50% ~ 95%, 크기 1.5, IP52

참고 사항:

CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004



CAUTION
LASER LIGHT

* DO NOT STARE INTO
BEAM.


MADE IN CHINA






MADE IN CHINA

CAUTION
PLEASE READ
*DO NOT STARE INTO
EYES.

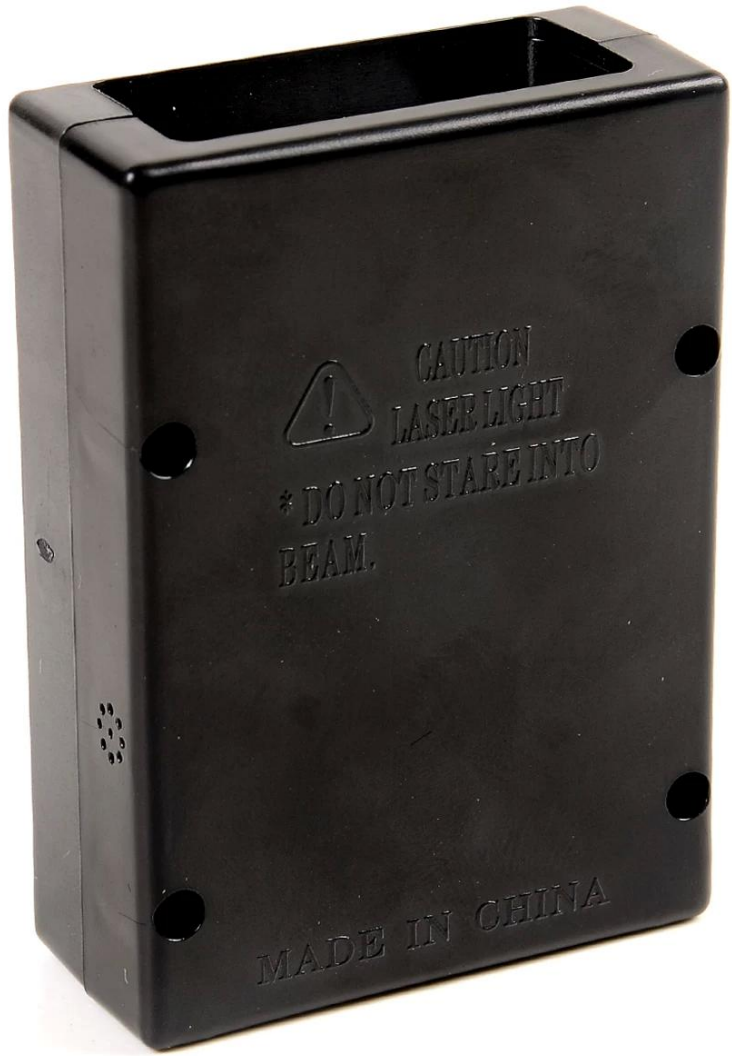

CAUTION
LASER LIGHT
* DO NOT STARE INTO
BEAM.

MADE IN CHINA

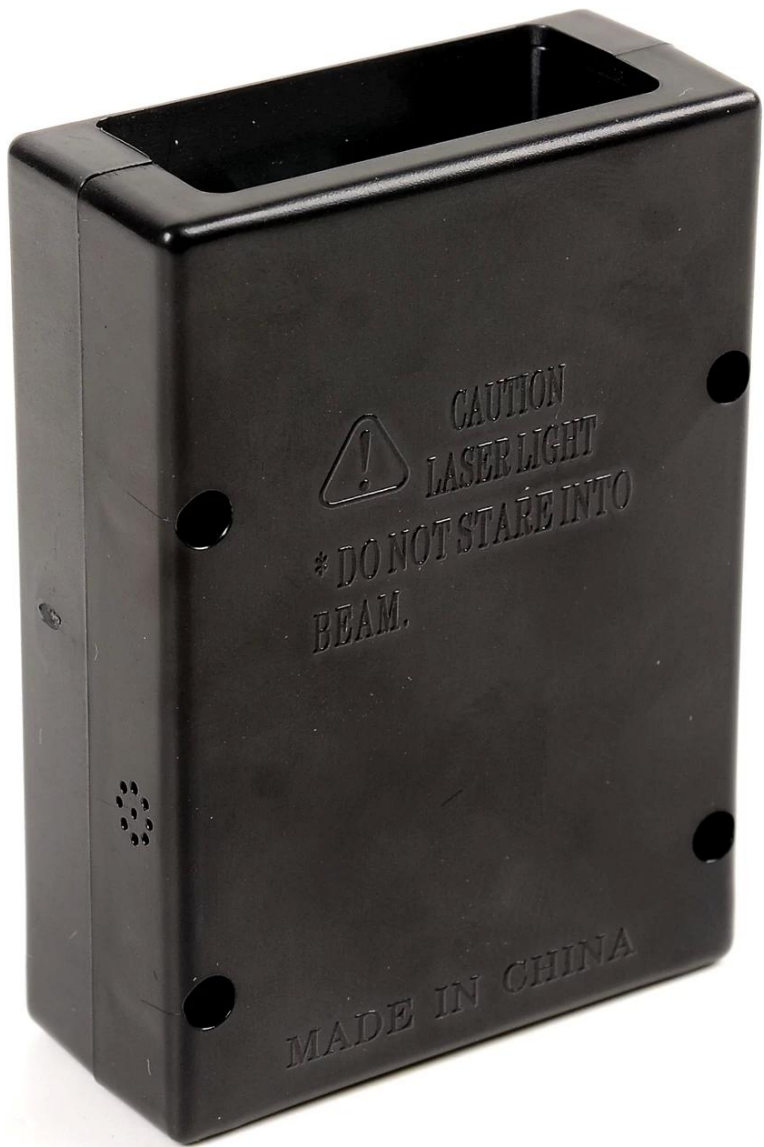

CAUTION
LASER LIGHT
* DO NOT STARE INTO
BEAM.

MADE IN CHINA

Yumite



