

malá velikost kabelové usb CCD snímač čárového moudle



Description

CCD skenování stroj umí dekodovat téměř všechny druhy 1D (pruhované) čárového kódu v projektu pomocí této roztomilou kompaktní čtečku čárových kódů. Podívali jsme se všude za malý, lehký, modul lowpower skeneru, který může být snadno integrován. This OEM CCD snímač motor lze snadno integrovat do různých kiosků, jízdenek strojů, ATM, PDA, POS atd. Nebo spojit s Android / iPhone do skenovat přímo.



Feature

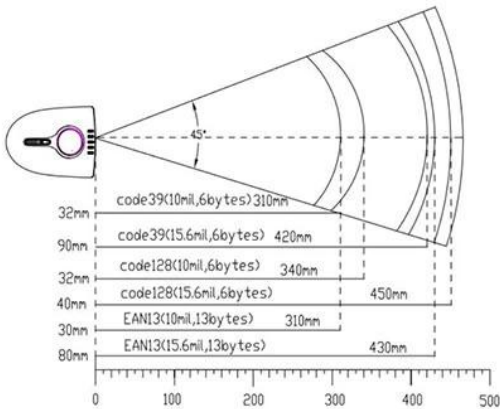
Skenování Motor YT-M301 CCD je vše v jednom modulu skeneru, který je nejjednodušší bychom mohli najít.

Na konci je jen USB kabel, zapojte jej do libovolného počítače a začít dekodovat do jedné sekundy.

Tento QR skener podporuje zásuvku rozhraní RS232 a USB. Další požadavky na rozhraní jsou obchodovatelné.



Specification

Para	Model	YT-M301
Image		
Image		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distance (without barrier)	—	
Infrared induction distance	150 - 200mm	
Optical Source	620nm Visible red light diode	
Imaging Sensor	CCD	
Image Resolution	2500Pixel	
Reading Precision	≥ 5mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	Code128, EAN-13, EAN-8, Code39,UPC-A, UPC-E, Codabar, Interleaved 2 of 5,ISBN, Code 93, UCC/EAN-128, GS1 Databar, ect.	
Decoding Speed	280times/second	
Barcode Sensitivity	Tilt	±55°
	Rotate	±25°
	Deflection	±75°
Data Interface	micro usb	
Mechanical and Electricl Performance		
Size(Length x Width x Height)	50×37.3×21.7 mm	
Weight	27g	
Indicator	Siren and LED light	
Battery Capacity	—	
Max.Power	700mw	
Working Voltage	DC5V	
Current	Max.Current	140ma
	Working Current	90ma
	Standby Current	45ma
	Sleeping Current	—
Charging Current	—	
Accessory List		
Data Cable	Micro USB	
Wireless Receiver	—	
CD	—	
Operation Manual	1	
Charge Station	—	
Enironmental Parameter		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Height Range	1.5M	
IP Rating	IP52	
Certification		
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004		



Factory



vítejte na kontakt s námi!