

YT-760A Auto-sense verdrahtete Laser Barcodescanner mit Ständer



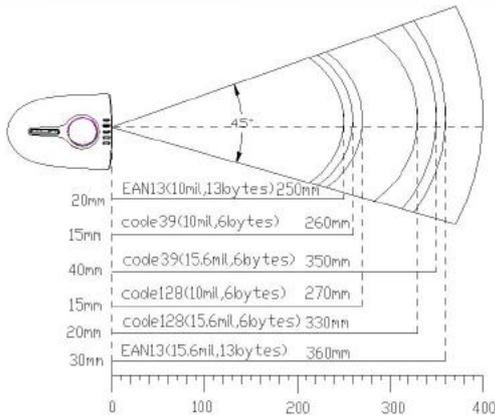
Description

YT-760A ist ein auto-sense verdrahtete Laser Barcode-Scanner. es kann mit POS-Systemen und sehr bequem zu bedienen verbunden werden,



Function

nur Notwendigkeit, den Scanner in den Stand setzen und dann lesen Sie den Strichcode von selbst aus.

Para	Model	YT-760A																		
Image																				
Image																				
Performance Parameter																				
Depth Filed	 <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>20mm</td> <td>EAN13(10mil,13bytes)</td> <td>250mm</td> </tr> <tr> <td>15mm</td> <td>code39(10mil,6bytes)</td> <td>260mm</td> </tr> <tr> <td>40mm</td> <td>code39(15.6mil,6bytes)</td> <td>350mm</td> </tr> <tr> <td>15mm</td> <td>code128(10mil,6bytes)</td> <td>270mm</td> </tr> <tr> <td>20mm</td> <td>code128(15.6mil,6bytes)</td> <td>330mm</td> </tr> <tr> <td>30mm</td> <td>EAN13(15.6mil,13bytes)</td> <td>360mm</td> </tr> </table>		20mm	EAN13(10mil,13bytes)	250mm	15mm	code39(10mil,6bytes)	260mm	40mm	code39(15.6mil,6bytes)	350mm	15mm	code128(10mil,6bytes)	270mm	20mm	code128(15.6mil,6bytes)	330mm	30mm	EAN13(15.6mil,13bytes)	360mm
20mm	EAN13(10mil,13bytes)	250mm																		
15mm	code39(10mil,6bytes)	260mm																		
40mm	code39(15.6mil,6bytes)	350mm																		
15mm	code128(10mil,6bytes)	270mm																		
20mm	code128(15.6mil,6bytes)	330mm																		
30mm	EAN13(15.6mil,13bytes)	360mm																		
Wireless Transmitting Distance (without barrier)	---																			
Infrared induction Distance	150 - 200mm																			
Optical Source	650nm Visible red light diode																			
Reading Percision	≥4mil																			
Minimum Contrast	≥ 30%																			
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvarians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.																			
Decoding Speed	100times/second																			
Barcode Sensitivity	Tilt	±65°																		
	Rotate	±42°																		
	Deflection	±60°																		
Data Interface	RJ-45																			
Mechanical and Electric Parameter																				
Size(Length x Width x Height)	92.5×70×154.6 mm																			
Weight	148g																			
Indicator	Siren and LED light																			
Battery Capacity	---																			
Max.Power	500mw																			
Working Voltage	DC5V																			
Current	Max.Current	100ma																		
	Working Current	97ma																		
	Standby Current	77ma																		
	Sleeping Current	---																		
Charging Current	450ma																			
Accessory List																				
Data Cable	Mirco USB																			
Wireless Receiver	---																			
CD	---																			
Operation Manual	1																			
Charge Station	---																			
Holder	1Set																			
Environmental Parameter																				
Storage Temperature	-40°C ~ 60°C																			
Working Temperature	0°C ~ 50°C																			
Relative Humidity	0 ~ 95%																			
Heigth Range	1.5M																			
IP Rating	IP52																			
Certification																				
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004																				



Useage



Our goods to all
over the world

Yumite





yumite.en.alibaba.com



