



Description

Nagelneu und hohe Qualität.

Mehrere Schnittstellen für eine verbesserte Kompatibilität.

Ausgestattet mit optional schön Signalton zur Bestätigung erfolgreich liest.


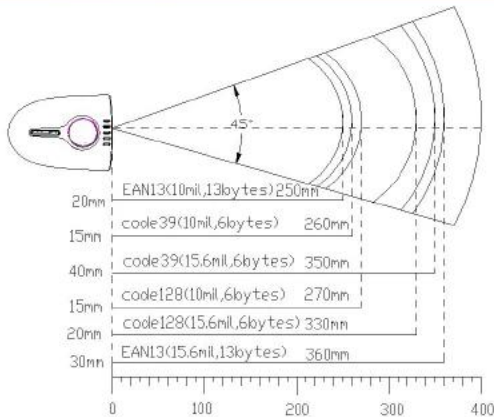
Excellent Feld Zuverlässigkeit auch in einer schrecklichen Umgebung im Freien.

Die kostengünstigste und einfach zu installieren Gerät auf dem Markt.

Plug and Play, keine Treiber oder spezielle Software benötigt.



Specification

Para	Model	YT-760A
Image		
Image		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distance (without barrier)	---	
Infrared induction Distance	150 - 200mm	
Optical Source	650nm Visible red light diode	
Reading Percision	≥4mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.	
Decoding Speed	100times/second	
Barcode Sensitivity	Tilt	±65°
	Rotate	±42°
	Deflection	±60°
Data Interface	RJ-45	
Mechanical and Electric Parameter		
Size(Length x Width x Height)	92.5×70×154.6 mm	
Weight	148g	
Indicator	Siren and LED light	
Battery Capacity	---	
Max.Power	500mw	
Working Voltage	DC5V	
Current	Max.Current	100ma
	Working Current	97ma
	Standby Current	77ma
	Sleeping Current	---
Charging Current	450ma	
Accessory List		
Data Cable	Mirco USB	
Wireless Receiver	---	
CD	---	
Operation Manual	1	
Charge Station	---	
Holder	1Set	
Environmental Parameter		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Heigth Range	1.5M	
IP Rating	IP52	
Certification		
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004		



Application



