

Optische Laser-Barcode-Scanner (USB) für Point of Sale, YT-760

Description

Yumite

Freuen Sie sich auf die Genauigkeit der Laser kompakt, ergonomisch und erschwingliche design. This Laser Barcode-

Scanner verbinden hohe Leistung, Genauigkeit und Wert. Sie bieten Best-in-Class-Lösungen

für den Einzelhandel, Kasse, Büro, Light Industrial, Lagerhalle, Bibliotheken, Medizin, Rechtswesen Büro,

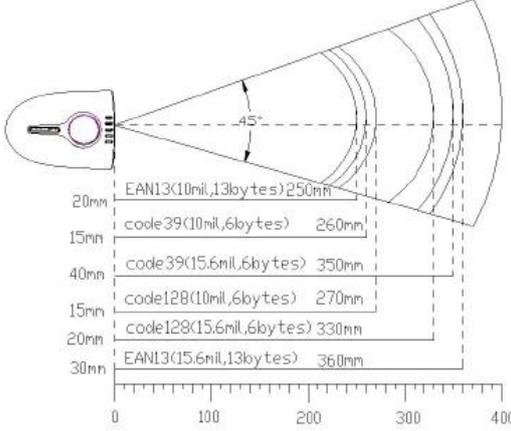
Regierung, Marketing und jede repetitiven Anwendung, wo Zeit und Genauigkeit kritisch sind

Faktoren bei der Unterstützung Unternehmen bei der Optimierung ihrer Workflow. Der USB ist mit MAC kompatibel

IOS und Windows.

Specification

Yumite

Para	Model	YT-760																		
Image																				
Image																				
Performance Parameter																				
Depth Filed	 <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>20mm</td> <td>EAN13(10mil,13bytes)</td> <td>250mm</td> </tr> <tr> <td>15mm</td> <td>code39(10mil,6bytes)</td> <td>260mm</td> </tr> <tr> <td>40mm</td> <td>code39(15.6mil,6bytes)</td> <td>350mm</td> </tr> <tr> <td>15mm</td> <td>code128(10mil,6bytes)</td> <td>270mm</td> </tr> <tr> <td>20mm</td> <td>code128(15.6mil,6bytes)</td> <td>330mm</td> </tr> <tr> <td>30mm</td> <td>EAN13(15.6mil,13bytes)</td> <td>360mm</td> </tr> </table>		20mm	EAN13(10mil,13bytes)	250mm	15mm	code39(10mil,6bytes)	260mm	40mm	code39(15.6mil,6bytes)	350mm	15mm	code128(10mil,6bytes)	270mm	20mm	code128(15.6mil,6bytes)	330mm	30mm	EAN13(15.6mil,13bytes)	360mm
20mm	EAN13(10mil,13bytes)	250mm																		
15mm	code39(10mil,6bytes)	260mm																		
40mm	code39(15.6mil,6bytes)	350mm																		
15mm	code128(10mil,6bytes)	270mm																		
20mm	code128(15.6mil,6bytes)	330mm																		
30mm	EAN13(15.6mil,13bytes)	360mm																		
Wireless Transmitting Distance (without barrier)	---																			
Infrared Induction Distance	---																			
Optical Source	650nm Visible red light diode																			
Reading Percision	≥4mil																			
Minimun Contrast	≥ 30%																			
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.																			
Decoding Speed	100times/second																			
Barcode Sensitivity	Tilt	±65°																		
	Rotate	±42°																		
	Deflection	±60°																		
Data Cable	RJ-45																			
Mechanical and Electric Parameter																				
Size(Length x Width x Height)	156×64×91 mm																			
Weight	108g																			
Indicator	Siren and LED light																			
Battery Capacity	---																			
Max.Power	450mw																			
Working Voltage	DC5V																			
Current	Max.Current	90ma																		
	Working Current	62ma																		
	Standby Current	71ma																		
	Sleeping Current	---																		
Charging current	450ma																			
Accessory List																				
Data Cable	Micro USB																			
Wireless Receiver	---																			
CD	---																			
Operation Manual	1																			
Charge Station	---																			
Environmental Parameter																				
Storage Temperature	-40°C ~ 60°C																			
Working Temperature	0°C ~ 50°C																			
Relative Humidity	0 ~ 95%																			
Height Range	1.5																			
IP Rating	IP52																			
Certification																				
CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004																				



Certificate of Compliance

Certificate Number: UN2014122403RC-3

Applicant : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No. 1, Dezheng Road, Shilong Community, Shiyan, Bao'an District, Shenzhen

Manufacturer : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No. 1, Dezheng Road, Shilong Community, Shiyan, Bao'an District, Shenzhen

Product : Bar-code Scanner

Trade Name : Yumite

M/N : YT-1000, YT-760, YT-760A, YT-760B, YT-M200, YT-1100A, YT-1100B, YT-M300, YT-2000, YT-2100A, YT-2100B, YT-M400, YT-XXXX

Test Standard: IEC62321:2013

The EUT described above has been consolidated by us and found in compliance with the council RoHS Directive 2011/65/EU. It is only valid in connection with the test report number: UN2014122403RR-3.

2014-12-24
Date of issue

Shenzhen United Testing Technology Co., Ltd.
Room 317-319, Block 1, University Town Technology Park,
5th Zone, South Section, Hongqiang Industrial Park,
Nanshan District, Shenzhen, P.R.C. 518055
Tel: +86-755-86180996 Fax: +86-755-86180138
<http://www.uni360.cn> E-mail: info@uni360.cn



RoHS





EC-R&TTE Certificate

Certificate Number: UN2014122403EC-1

Applicant : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No. 1, Dezheng Road, Shilong Community, Shiyan, Bao'an District, Shenzhen

Manufacturer : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No. 1, Dezheng Road, Shilong Community, Shiyan, Bao'an District, Shenzhen

Product : Bar-code Scanner

Trade Name : Yumite

M/N : YT-1300, YT-860, YT-1200, YT-1400, YT-1600, YT-2200, YT-2300, YT-2400, YT-2500, YT-XXXX

Essential requirement	Applied Specifications/Standards	Documentary Evidence	Result
Art.3.1(a) Health	Not assessed		
Art.3.1(a) Safety	EN60950-1	UN2014122403ER-1	Pass
Art.3.1(b) EMC	ETSI EN301 489-1/3	UN2014122403ER-1	Pass
Art.3.2 Radio	ETSI EN300 440	UN2014122403ER-2	Pass

The EUT described above has been tested by us with the listed standards and found in compliance with the council R&TTE directive 99/5/EC. It is possible to use CE marking to demonstrate the compliance with this Directive.
The scope of evaluation relates to the submitted documents only.

2014-12-24
Date of issue

Shenzhen United Testing Technology Co., Ltd.
Room 317-319, Block 1, University Town Technology Park,
5th Zone, South Section, Hongqiang Industrial Park,
Nanshan District, Shenzhen, P.R.C. 518055
Tel: +86-755-86180996 Fax: +86-755-86180138
<http://www.uni360.cn> E-mail: info@uni360.cn



