YT-1101B Hand semi-auto Sinne CCD Barcodescanner mit Ständer

Description

YT-1101B ist semi-auto Sinne verdrahtete CCD Barcode-Scanner, die auf dem Stand gesetzt werden kann und mit POS, ATM, Fahrkartenautomaten verbunden ist und so weiter.

Function

das Design der YT-1101B ist sehr humanized.when Sie die automatische Erkennung möchte nur noch den Auslöser 10 Sekunden lang drücken und dann der Scanner den Strichcode automatisch gelesen .also können Sie den Barcode für die manuelle Bedienung zu lesen. so gibt es zwei Arten der Funktion, die Sie wählen können.

Specification

Para / Model		YT-1101B
Image		
Image		
Performance Parameter		
Depth Filed		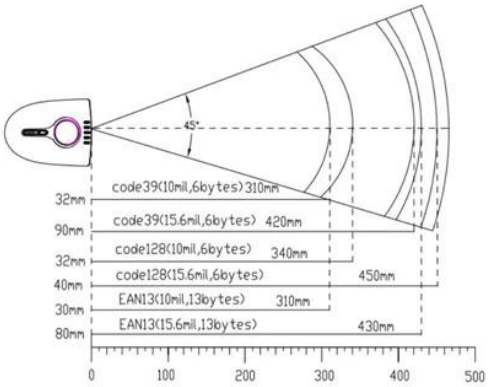
Wireless Transmitting Distance (without barrier)		——
Infrared induction distance		150 - 200mm
Optical Source		620nm Visible red light diode
Imaging Sensor		CCD
Image Resolution		2500Pixel
Reading Precision		≥ 5mil
Minimum Contrast		≥ 30%
Decoding Capacity		Code128, EAN-13, EAN-8, Code39,UPC-A, UPC-E, Codabar, Interleaved 2 of 5,ISBN, Code 93, UCC/EAN-128, GS1 Databar,ect.
Decoding Speed		280time/second
Barcode Sensitivity	Tile	±55°
	Rotate	±25°
	Deflection	±75°
Data Interface		RJ-45
Mechanical and Electric Performance		
Size(Length x Width x Height)		92.5×70×154.6 mm
Weight		140g
Indicator		Visible red light diode
Battery Capacity		——
Max.Power		500mw
Working Voltage		DC5V
Working Voltage	Max.Current	100ma
	Working Current	89ma
	Standby Current	47ma
	Standby Current	——
Charging Current		——
Charging Time		——
A fully charged readable barcode		——
Accessory List		
Data Cable		Micro USB
		RS232 Cable
Wireless Receiver		——
CD		——
Operation Manual		1
Charge Station		——
Holder		1Set
Environment Parameter		
Storage Temperature		-40°C ~ 60°C
Working Temperature		0°C ~ 50°C
Relative Humidity		0 ~ 95%
Height Range		2M
IP Rating		IP52
Certification		
CE,RoHS,EMC,LVD，ISO9001:2008,ISO14001:2004		