Drahtlose Übertragung Distanc (ohne Barriere): 300-400m
Infrarot-Induktion Entfernung — —
Optische Quelle: 650nm sichtbares rotes Licht Diode
Bild-Auflösung: ≥4mil
Minimale Kontrast: ≥ 30 %
Barcode-Typen: "UPC/EAN/JAN, UPC/EAN mit Nahrungsergänzungsmittel,
UCC/EAN128, Code39, MSI, Code11, Code39 voll ASCll,
Trioptic Code39, Code128, Code128, voll ASCll Codabar, Code93,
Diskrete 2 von 5 IATA, RSSvanrians, Codabar, chinesische 2/5, Interleaved 2/5,
Interleaved 2 von 5, internationale allgemeine dreidimensionale barcodes "
Decodierung Geschwindigkeit: 100times/s
Barcode-Empfindlichkeit-Tilt: ±65 °
Drehen: ±42 °
Durchbiegung: ±60 °
Daten-Schnittstelle: RJ-45
Mechanische und elektrische Leistung
Größe (Länge x Breite x Höhe): 210 × 84 × 117.5 mm
Gewicht (mit Ausnahme von Kabel): 321g
Indikator: Sirene und LED Licht
Akku-Kapazität: 600mah
Begrenzbar: 520mw
Betriebsspannung: DC5V
Aktuelle Max.Curren: 104ma
Aktuelle Arbeiten: 77ma
Stand-by-Strom: 56ma
Aktuelle ≤ 3ua schlafen
Laden aktuelle 450ma
Zubehörliste
Datenleitung USB-Datenleitung (1,8 m) — —
Empfänger – —
Laufwerk CD — —
Bedienungsanleitung: 1 Stück
Ladeschale: 1 Stück
Ökologische Parameter
Lagertemperatur :-40 ° C ~ 60° C
Arbeitstemperatur: 0° C ~ 50° C
Relative Luftfeuchtigkeit: 0 ~ 95 %
Höhenbereich: 1,5 m
IP-Schutzart: IP52

Zertifikate:

CE, RoHS, EMC, LVD, ISO9001: 2008, ISO14001:2004

Para / Model		YT-900
Image		
Image		
Performance Parameter		
Depth Filed		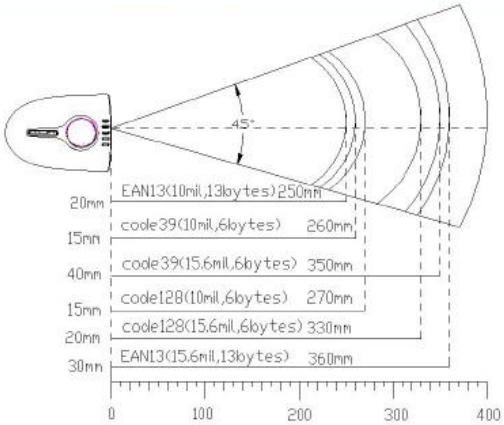
Wireless Transmitting Distance (without barrier)		300 - 400M
Infrared induction distance		——
Optical Source		650nm Visible red light diode
Reading Precision		≥4mil
Minimum Contrast		≥ 30%
Decoding Capacity		UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.
Decoding Speed		100times/second
Barcode Sensitivity	Tilt	±65°
	Rotate	±42°
	Deflestion	±60°
Data Interface		RJ-45
Mechanical and Electric Performance		
Size(Length x Width x Height)		210×84×117.5 mm
Weight		321g
Indicator		Siren and LED light
Battery Capacity		600mah
Max.Power		520mw
Working Voltage		DC5V
Current	Max.Current	104ma
	Working Current	77ma
	Standby Current	56ma
	Sleeping Current	≤ 3ua
Charging Current		450ma
Accessory List		
Data Cable		Micro USB
		——
Wireless Receiver		——
CD		——
Operation Manual		1
Charge Station		1
Environmental Parameter		
Storage Temperature		-40°C ~ 60°C
Working Temperature		0°C ~ 50°C
Relative Humidity		0 ~ 95%
Height Range		1.5M
IP Rating		IP52
Certification		
CE,RoHS,EMC,LVD，ISO9001:2008,ISO14001:2004		