
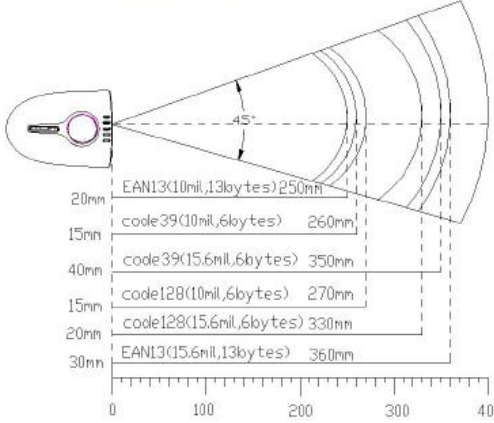


Drahtlose Übertragung Distanz (ohne Barriere): 300-400m  
Infrarot-Induktion Entfernung — —  
Optische Quelle: 650nm sichtbares rotes Licht Diode  
Bild-Auflösung:  $\geq 4$ mil  
Minimale Kontrast:  $\geq 30$  %  
Barcode-Typen: "UPC/EAN/JAN, UPC/EAN mit Nahrungsergänzungsmittel,  
UCC/EAN128, Code39, MSI, Code11, Code39 voll ASCII,  
Trioptic Code39, Code128, Code128, voll ASCII Codabar, Code93,  
Diskrete 2 von 5 IATA, RSSvanriens, Codabar, chinesische 2/5, Interleaved 2/5,  
Interleaved 2 von 5, internationale allgemeine dreidimensionale barcodes" "  
Decodierung Geschwindigkeit: 100times/s  
Barcode-Empfindlichkeit-Tilt:  $\pm 65$  °  
Drehen:  $\pm 42$  °  
Durchbiegung:  $\pm 60$  °  
Daten-Schnittstelle: RJ-45  
Mechanische und elektrische Leistung  
Größe (Länge x Breite x Höhe): 210 × 84 × 117.5 mm  
Gewicht (mit Ausnahme von Kabel): 321g  
Indikator: Sirene und LED Licht  
Akku-Kapazität: 600mah  
Begrenzbar: 520mw  
Betriebsspannung: DC5V  
Aktuelle Max.Curren: 104ma  
Aktuelle Arbeiten: 77ma  
Stand-by-Strom: 56ma  
Aktuelle  $\leq 3$ ua schlafen  
Laden aktuelle 450ma  
Zubehörliste  
Datenleitung USB-Datenleitung (1,8 m) — —  
Empfänger - —  
Laufwerk CD — —  
Bedienungsanleitung: 1 Stück  
Ladeschale: 1 Stück  
Ökologische Parameter  
Lagertemperatur : -40 ° C ~ 60° C  
Arbeitstemperatur: 0° C ~ 50° C  
Relative Luftfeuchtigkeit: 0 ~ 95 %  
Höhenbereich: 1,5 m  
IP-Schutzart: IP52

Zertifikate:

CE, RoHS, EMC, LVD, ISO9001: 2008, ISO14001:2004

Para	Model	YT-900
<b>Image</b>		
Image		
<b>Performance Parameter</b>		
Depth Filed		
Wireless Transmitting Distance (without barrier)	300 - 400M	
Infrared induction distance	---	
Optical Source	650nm Visible red light diode	
Reading Precision	≥4mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN, UPC/EAN with supplementals, UCC/EAN128, Code39, MSI, Code 11, Code39 Full ASCII, Code39 Trioptic, Code128, Code128 Full ASCII, Codabar, Code93, Discrete 2 of 5 IATA, RSS variants, Codabar, chinese 2 of 5, Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g. China postal service code, ect.	
Decoding Speed	100times/second	
Barcode Tilt	±65°	
Sensitivity Rotate	±42°	
Deflection	±60°	
Data Interface	RJ-45	
<b>Mechanical and Electric Performance</b>		
Size (Length x Width x Height)	210×84×117.5 mm	
Weight	321g	
Indicator	Siren and LED light	
Battery Capacity	600mah	
Max. Power	520mw	
Working Voltage	DC5V	
Current	Max. Current	104ma
	Working Current	77ma
	Standby Current	56ma
	Sleeping Current	≤ 3ua
Charging Current	450ma	
<b>Accessory List</b>		
Data Cable	Micro USB	
Wireless Receiver	---	
CD	---	
Operation Manual	1	
Charge Station	1	
<b>Environmental Parameter</b>		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Height Range	1.5M	
IP Rating	IP52	
<b>Certification</b>		
CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004		