



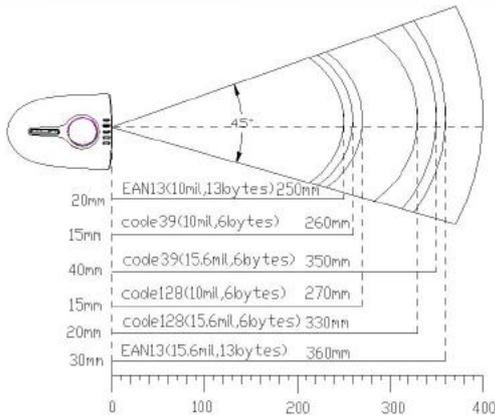
## Description

El innovador escáner Yumite manual del fabricante del escáner de código de barras yumite ofrece características de rendimiento a un precio asequible para tomar su decisión de compra más fácil que nunca.

Si usted está buscando la protección de la inversión y de gran valor en un pequeño escáner, la luz que asegura la máxima productividad, entonces el escáner de código de barras láser YT-760A 1D es el escáner ideal para ti. Desde la cola de la caja a la trastienda, el YT-760B le ayuda a sacar el máximo provecho de su solución específica de la aplicación en una variedad de maneras.



## Specification

Para	Model	YT-760A																		
<b>Image</b>																				
Image																				
<b>Performance Parameter</b>																				
Depth Filed	 <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>20mm</td> <td>EAN13(10mil,13bytes)</td> <td>250mm</td> </tr> <tr> <td>15mm</td> <td>code39(10mil,6bytes)</td> <td>260mm</td> </tr> <tr> <td>40mm</td> <td>code39(15.6mil,6bytes)</td> <td>350mm</td> </tr> <tr> <td>15mm</td> <td>code128(10mil,6bytes)</td> <td>270mm</td> </tr> <tr> <td>20mm</td> <td>code128(15.6mil,6bytes)</td> <td>330mm</td> </tr> <tr> <td>30mm</td> <td>EAN13(15.6mil,13bytes)</td> <td>360mm</td> </tr> </table>		20mm	EAN13(10mil,13bytes)	250mm	15mm	code39(10mil,6bytes)	260mm	40mm	code39(15.6mil,6bytes)	350mm	15mm	code128(10mil,6bytes)	270mm	20mm	code128(15.6mil,6bytes)	330mm	30mm	EAN13(15.6mil,13bytes)	360mm
20mm	EAN13(10mil,13bytes)	250mm																		
15mm	code39(10mil,6bytes)	260mm																		
40mm	code39(15.6mil,6bytes)	350mm																		
15mm	code128(10mil,6bytes)	270mm																		
20mm	code128(15.6mil,6bytes)	330mm																		
30mm	EAN13(15.6mil,13bytes)	360mm																		
Wireless Transmitting Distance (without barrier)	---																			
Infrared induction Distance	150 - 200mm																			
Optical Source	650nm Visible red light diode																			
Reading Percision	≥4mil																			
Minimum Contrast	≥ 30%																			
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvarians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.																			
Decoding Speed	100times/second																			
Barcode Sensitivity	Tilt	±65°																		
	Rotate	±42°																		
	Deflection	±60°																		
Data Interface	RJ-45																			
<b>Mechanical and Electric Parameter</b>																				
Size(Length x Width x Height)	92.5×70×154.6 mm																			
Weight	148g																			
Indicator	Siren and LED light																			
Battery Capacity	---																			
Max.Power	500mw																			
Working Voltage	DC5V																			
Current	Max.Current	100ma																		
	Working Current	97ma																		
	Standby Current	77ma																		
	Sleeping Current	---																		
Charging Current	450ma																			
<b>Accessory List</b>																				
Data Cable	Mirco USB																			
Wireless Receiver	---																			
CD	---																			
Operation Manual	1																			
Charge Station	---																			
Holder	1Set																			
<b>Environmental Parameter</b>																				
Storage Temperature	-40°C ~ 60°C																			
Working Temperature	0°C ~ 50°C																			
Relative Humidity	0 ~ 95%																			
Heigth Range	1.5M																			
IP Rating	IP52																			
<b>Certification</b>																				
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004																				



# Application

