
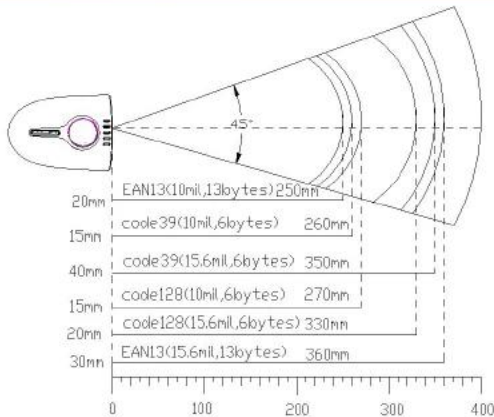


YT-760A láser con cable automático de sentido con el titular y USB / RS232 calidad competitiva cable



| Para | Model | YT-760A |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Image | | |
| Image |  | |
| Performance Parameter | | |
| Depth Filed |  | |
| Wireless Transmitting Distance (without barrier) | --- | |
| Infrared induction Distance | 150 - 200mm | |
| Optical Source | 650nm Visible red light diode | |
| Reading Percision | ≥4mil | |
| Minimum Contrast | ≥ 30% | |
| Decoding Capacity | UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvarians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect. | |
| Decoding Speed | 100times/second | |
| Barcode Sensitivity | Tilt | ±65° |
| | Rotate | ±42° |
| | Deflection | ±60° |
| Data Interface | RJ-45 | |
| Mechanical and Electric Parameter | | |
| Size(Length x Width x Height) | 92.5×70×154.6 mm | |
| Weight | 148g | |
| Indicator | Siren and LED light | |
| Battery Capacity | --- | |
| Max.Power | 500mw | |
| Working Voltage | DC5V | |
| Current | Max.Current | 100ma |
| | Working Current | 97ma |
| | Standby Current | 77ma |
| | Sleeping Current | --- |
| Charging Current | 450ma | |
| Accessory List | | |
| Data Cable | Mirco USB | |
| Wireless Receiver | --- | |
| CD | --- | |
| Operation Manual | 1 | |
| Charge Station | --- | |
| Holder | 1Set | |
| Environmental Parameter | | |
| Storage Temperature | -40°C ~ 60°C | |
| Working Temperature | 0°C ~ 50°C | |
| Relative Humidity | 0 ~ 95% | |
| Heigth Range | 1.5M | |
| IP Rating | IP52 | |
| Certification | | |
| CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004 | | |

