



Description

Brand new and high quality.

Multiple interfaces for enhanced compatibility.

Equipped with optional nice beeper to confirm successful reads.


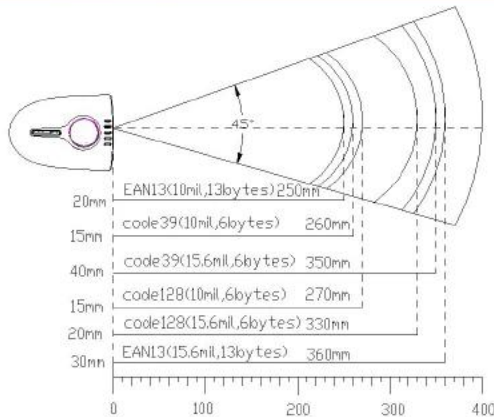
Excellent field reliability even in a terrible outdoor environment.

The most cost-effective and easy-install device on the market.

Plug and play, no drivers or special software needed.



Specification

Para	Model	YT-760A
Image		
Image		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distance (without barrier)	—	
Infrared induction Distance	150 - 200mm	
Optical Source	650nm Visible red light diode	
Reading Percision	≥4mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.	
Decoding Speed	100times/second	
Barcode Tilt	±65°	
Sensitivity Rotate	±42°	
Deflection	±60°	
Data Interface	RJ-45	
Mechanical and Electric Parameter		
Size(Length x Width x Height)	92.5×70×154.6 mm	
Weight	148g	
Indicator	Siren and LED light	
Battery Capacity	—	
Max.Power	500mw	
Working Voltage	DC5V	
Current	Max.Current	100ma
	Working Current	97ma
	Standby Current	77ma
	Sleeping Current	—
Charging Current	450ma	
Accessory List		
Data Cable	Mirco USB	
Wireless Receiver	—	
CD	—	
Operation Manual	1	
Charge Station	—	
Holder	1Set	
Environmental Parameter		
Storage Temperature	-40℃ ~ 60℃	
Working Temperature	0℃ ~ 50℃	
Relative Humidity	0 ~ 95%	
Heigth Range	1.5M	
IP Rating	IP52	
Certification		
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004		



Application



