
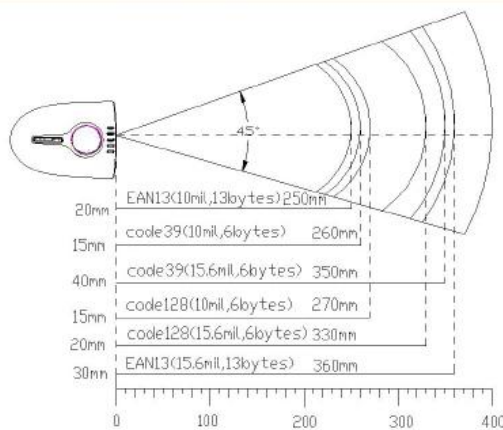


Wireless Transmitting Distance (without barrier): 300 - 400m
Infrared induction distance ——
Optical Source :650nm Visible red light diode
Image Resolution: $\geq 4\text{mil}$
Minimum Contrast : $\geq 30\%$
Barcode Types : "UPC/EAN/JAN, UPC/EAN with supplementals
UCC/EAN128, Code39, MSI, Code11, Code39 Full ASCII,
Code39 Trioptic, Code128, Code128 Full ASCII Codabar, Code93,
Discrete 2 of 5 IATA, RSS variants, Codabar, Chinese 2 of 5, Interleaved 2/5,
Interleaved 2 of 5, International general dimensional barcodes"
Decoding Speed :100times/s
Barcode Sensitivity Tilt : $\pm 65^\circ$
Rotate : $\pm 42^\circ$
Deflection : $\pm 60^\circ$
Data Interface Port :RJ-45
Mechanical and Electric Performance
Size(Length x Width x Height): 210×84×117.5 mm
Weight (except cable) :321g
Indicator: Siren and LED light
Battery Capacity :600mah
Max.Power :520mw
Working Voltage :DC5V
Current Max.Current :104ma
Working Current :77ma
Stand-by Current :56ma
Sleeping Current $\leq 3\mu\text{A}$
Charging Current 450ma
Accessory List
Data line USB data line(1.8m)——
Receiver ——
Drive CD ——
Operation Manual :1 Piece
Charging Cradle :1 Piece
Environmental Parameter
Storage Temperature : $-40^\circ\text{C} \sim 60^\circ\text{C}$
Working Temperature : $0^\circ\text{C} \sim 50^\circ\text{C}$
Relative Humidity :0 ~ 95%
Height Range: 1.5m
IP Rating: IP52

Certificates:

CE, RoHS, EMC, LVD □ ISO9001:2008 □ ISO14001:2004

Para	Model	YT-900
Image		
Image		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distance (without barrier)	300 - 400M	
Infrared induction distance	—	
Optical Source	650nm Visible red light diode	
Reading Precision	≥4mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanriars,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.	
Decoding Speed	100times/second	
Barcode Sensitivity	Tilt	±65°
	Rotate	±42°
	Deflection	±60°
Data Interface	RJ-45	
Mechanical and Electric Performance		
Size(Length x Width x Height)	210×84×117.5 mm	
Weight	321g	
Indicator	Siren and LED light	
Battery Capacity	600mah	
Max.Power	520mw	
Working Voltage	DC5V	
Current	Max.Current	104ma
	Working Current	77ma
	Standby Current	56ma
	Sleeping Current	≤ 3ua
Charging Current	450ma	
Accessory List		
Data Cable	Micro USB	
Wireless Receiver	—	
CD	—	
Operation Manual	1	
Charge Station	1	
Environmental Parameter		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Height Range	1.5M	
IP Rating	IP52	
Certification		
CE,RoHS,EMC,LVD, ISO9001:2008,ISO14001:2004		