
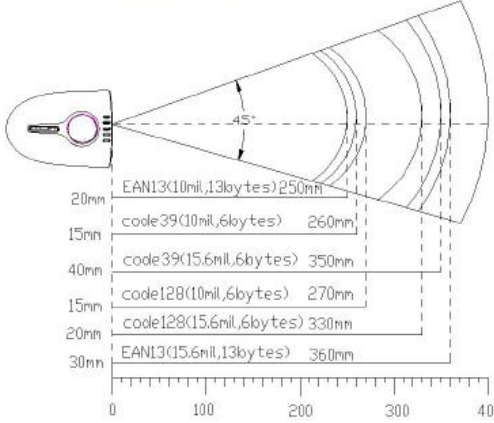


Wireless Transmitting Distance (without barrier): 300 - 400m  
Infrared induction distance ——  
Optical Source :650nm Visible red light diode  
Image Resolution:  $\geq 4\text{mil}$   
Minimum Contrast : $\geq 30\%$   
Barcode Types : "UPC/EAN/JAN, UPC/EAN with supplementals  
UCC/EAN128, Code39, MSI, Code11, Code39 Full ASCII,  
Code39 Trioptic, Code128, Code128 Full ASCII Codabar, Code93,  
Discrete 2 of 5 IATA, RSSvanrians, Codabar, chinese 2 of 5, Interleaved 2/5,  
Interleaved 2 of 5, International general dimensional barcodes"  
Decoding Speed :100times/s  
Barcode Sensitivity Tilt : $\pm 65^\circ$   
Rotate : $\pm 42^\circ$   
Deflection : $\pm 60^\circ$   
Data Interface Port :RJ-45  
Mechanical and Electric Performance  
Size(Length x Width x Height): 210×84×117.5 mm  
Weight (except cable) :321g  
Indicator: Siren and LED light  
Battery Capacity :600mah  
Max.Power :520mw  
Working Voltage :DC5V  
Current Max.Curren :104ma  
Working Current :77ma  
Stand-by Current :56ma  
Sleeping Current  $\leq 3\text{ua}$   
Charging Current 450ma  
Accessory List  
Data line USB data line(1.8m)——  
Receiver ——  
Drive CD ——  
Operation Manual :1 Piece  
Charging Cradle :1 Piece  
Environmental Parameter  
Storage Temperature : $-40^\circ\text{C} \sim 60^\circ\text{C}$   
Working Temperature : $0^\circ\text{C} \sim 50^\circ\text{C}$   
Relative Humidity :0 ~ 95%  
Height Range: 1.5m  
IP Rating: IP52

Certificates:

CE,RoHS,EMC,LVD□ISO9001:2008□ISO14001:2004

Para	Model	YT-900
<b>Image</b>		
Image		
<b>Performance Parameter</b>		
Depth Filed		
Wireless Transmitting Distance (without barrier)	300 - 400M	
Infrared induction distance	---	
Optical Source	650nm Visible red light diode	
Reading Precision	≥4mil	
Minimum Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN, UPC/EAN with supplementals, UCC/EAN128, Code39, MSI, Code 11, Code39 Full ASCII, Code39 Trioptic, Code128, Code128 Full ASCII, Codabar, Code93, Discrete 2 of 5 IATA, RSS variants, Codabar, chinese 2 of 5, Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g. China postal service code, ect.	
Decoding Speed	100times/second	
Barcode Tilt	±65°	
Sensitivity Rotate	±42°	
Deflection	±60°	
Data Interface	RJ-45	
<b>Mechanical and Electric Performance</b>		
Size (Length x Width x Height)	210×84×117.5 mm	
Weight	321g	
Indicator	Siren and LED light	
Battery Capacity	600mah	
Max. Power	520mw	
Working Voltage	DC5V	
Current	Max. Current	104ma
	Working Current	77ma
	Standby Current	56ma
	Sleeping Current	≤ 3ua
Charging Current	450ma	
<b>Accessory List</b>		
Data Cable	Micro USB	
Wireless Receiver	---	
CD	---	
Operation Manual	1	
Charge Station	1	
<b>Environmental Parameter</b>		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Height Range	1.5M	
IP Rating	IP52	
<b>Certification</b>		
CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004		