
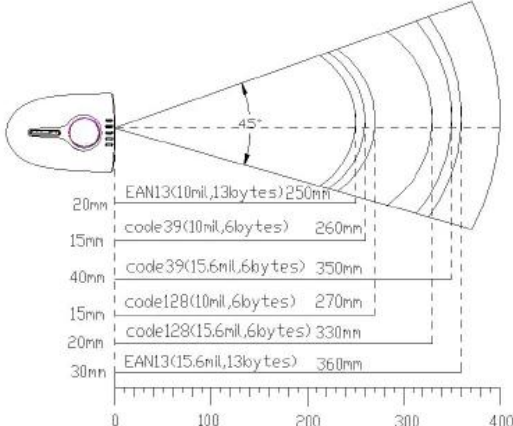


**low cost handheld laser barcode scanner supplied in
POS system supplier china**

Para	Model	YT-760
Image		
Image		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distance (without barrier)	——	
Infrared Induction Distance	——	
Optical Source	650nm Visible red light diode	
Reading Percision	≥4mil	
Minimun Contrast	≥ 30%	
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.	
Decoding Speed	100times/second	
Barcode Sensitivity	Tilt	±65°
	Rotate	±42°
	Deflection	±60°
Data Cable	RJ-45	
Mechanical and Electric Parameter		
Size(Length x Width x Height)	156×64×91 mm	
Weight	108g	
Indicator	Siren and LED light	
Battery Capacity	——	
Max.Power	450mw	
Working Voltage	DC5V	
Current	Max.Current	90ma
	Working Current	62ma
	Standby Current	71ma
	Sleeping Current	——
Charging current	450ma	
Accessory List		
Data Cable	Micro USB	
Wireless Receiver	——	
CD	——	
Operation Manual	1	
Charge Station	——	
Environmental Parameter		
Storage Temperature	-40℃ ~ 60℃	
Working Temperature	0℃ ~ 50℃	
Relative Humidity	0 ~ 95%	
Height Range	1.5	
IP Rating	IP52	
Certification		
CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004		

