
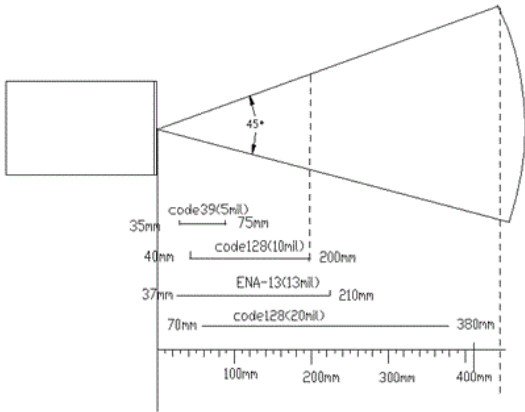


| Para | Model | YT-M503 | wired 2D scan module barcode reader |
|--|---|-------------|-------------------------------------|
| Picture | | | |
| Product Picture |  | | |
| Performance Parameter | | | |
| Depth Filed |  | | |
| Infrared induction distance | 150 - 200mm | | |
| Optical Source | 620nm Visible red light diode | | |
| Imaging Sensor | CMOS | | |
| Resolution Ratio | 30 million pixels | | |
| Image Resolution | ≥ 5mil | | |
| Minimum Contrast | ≥ 30% | | |
| Barcode Types | 1D CODE128 EAN-8 EAN-13 UPC-E UPC-A Interleaved 2 of 5 ITF14 MATRIX 25 Code39 Codabar Code93 UCC/EAN-128 Code11 ISBN INDUSTRIAL25 STANDARD25 Plessey MSI_Plessey 2D PDF417 QR Aztec DataMatrix Maxicode MicroPDF417 SPEC_OCR_B | | |
| Barcode Sensitivity | Tilt | ± 55° | |
| | Rotate | ± 25° | |
| | Deflection | ± 75° | |
| Data Interface Port | USB RS232 | | |
| Mechanical and Electric Performance | | | |
| Size(Length x Width x Height) | 50mm×37mm×21mm | | |
| Weight | 3.7g | | |
| Indicator | Siren and LED light | | |
| Max.Power | 1060mw | | |
| Working Voltage | 5V | | |
| Current | Max.Current | 212mA | |
| | Working Current | 156mA~212mA | |
| | Stand-by Current | 156mA | |
| Environmental Parameter | | | |
| Storage Temperature | -40° C ~ 60° C | | |
| Working Temperature | 0° C ~ 50° C | | |
| Relative Humidity | 0 ~ 95% | | |
| Height Range | 1.5m | | |
| IP Rating | IP52 | | |



