

## Venda imperdível Wired Handheld Laser Barcode Scanner YT-760




### Description

**Yumite**

Wired barcode scanner a laser com scanner de cabo USB YT-760 é um laser com fio barcode scanner pode ser utilizado no supermercado, logística, livraria, hospital etc. Numa palavra, onde existe um código de barras é um fio lá barcode scanner a laser com scanner de cabo USB pode ser usado.

A performance de YT-760 é muito elevado, não só com velocidade de digitalização mais rápido, mas também têm custo baixo preço. O digitalizador é emborrachado com escudo sólido que pode ser caiu de 2m de altura lugar. E ele pode ler UPC / EAN / JAN, UPC / EAN com mentals flexíveis, Discrete 2 de 5 IATA, RSSvanrians, Codabar, chinês 2 de 5, Intercalado 2/5 etc.

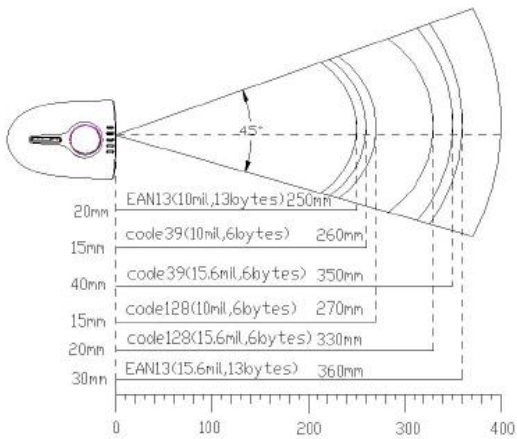

| Para                                             | Model                                                                                                                                                                                                                                                                                                                            | YT-760 |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Image                                            |                                                                                                                                                                                                                                                                                                                                  |        |
| Image                                            |                                                                                                                                                                                                                                                 |        |
| Performance Parameter                            |                                                                                                                                                                                                                                                                                                                                  |        |
| Depth Filed                                      |                                                                                                                                                                                                                                                |        |
| Wireless Transmitting Distance (without barrier) | ——                                                                                                                                                                                                                                                                                                                               |        |
| Infrared Induction Distance                      | ——                                                                                                                                                                                                                                                                                                                               |        |
| Optical Source                                   | 650nm Visible red light diode                                                                                                                                                                                                                                                                                                    |        |
| Reading Percision                                | ≥4mil                                                                                                                                                                                                                                                                                                                            |        |
| Minimun Contrast                                 | ≥ 30%                                                                                                                                                                                                                                                                                                                            |        |
| Decoding Capacity                                | UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect. |        |
| Decoding Speed                                   | 100times/second                                                                                                                                                                                                                                                                                                                  |        |
| Barcode Sensitivity                              | Tilt                                                                                                                                                                                                                                                                                                                             | ±65°   |
|                                                  | Rotate                                                                                                                                                                                                                                                                                                                           | ±42°   |
|                                                  | Deflection                                                                                                                                                                                                                                                                                                                       | ±60°   |
| Data Cable                                       | RJ-45                                                                                                                                                                                                                                                                                                                            |        |
| Mechanical and Electric Parameter                |                                                                                                                                                                                                                                                                                                                                  |        |
| Size(Length x Width x Height)                    | 156×64×91 mm                                                                                                                                                                                                                                                                                                                     |        |
| Weight                                           | 108g                                                                                                                                                                                                                                                                                                                             |        |
| Indicator                                        | Siren and LED light                                                                                                                                                                                                                                                                                                              |        |
| Battery Capacity                                 | ——                                                                                                                                                                                                                                                                                                                               |        |
| Max.Power                                        | 450mw                                                                                                                                                                                                                                                                                                                            |        |
| Working Voltage                                  | DC5V                                                                                                                                                                                                                                                                                                                             |        |
| Current                                          | Max.Current                                                                                                                                                                                                                                                                                                                      | 90ma   |
|                                                  | Working Current                                                                                                                                                                                                                                                                                                                  | 62ma   |
|                                                  | Standby Current                                                                                                                                                                                                                                                                                                                  | 71ma   |
|                                                  | Sleeping Current                                                                                                                                                                                                                                                                                                                 | ——     |
| Charging current                                 | 450ma                                                                                                                                                                                                                                                                                                                            |        |
| Accessory List                                   |                                                                                                                                                                                                                                                                                                                                  |        |
| Data Cable                                       | Micro USB                                                                                                                                                                                                                                                                                                                        |        |
| Wireless Receiver                                | ——                                                                                                                                                                                                                                                                                                                               |        |
| CD                                               | ——                                                                                                                                                                                                                                                                                                                               |        |
| Operation Manual                                 | 1                                                                                                                                                                                                                                                                                                                                |        |
| Charge Station                                   | ——                                                                                                                                                                                                                                                                                                                               |        |
| Environmental Parameter                          |                                                                                                                                                                                                                                                                                                                                  |        |
| Storage Temperature                              | -40℃ ~ 60℃                                                                                                                                                                                                                                                                                                                       |        |
| Working Temperature                              | 0℃ ~ 50℃                                                                                                                                                                                                                                                                                                                         |        |
| Relative Humidity                                | 0 ~ 95%                                                                                                                                                                                                                                                                                                                          |        |
| Height Range                                     | 1.5                                                                                                                                                                                                                                                                                                                              |        |
| IP Rating                                        | IP52                                                                                                                                                                                                                                                                                                                             |        |
| Certification                                    |                                                                                                                                                                                                                                                                                                                                  |        |
| CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004  |                                                                                                                                                                                                                                                                                                                                  |        |



## CERTIFICATE OF REGISTRATION

Certificate No.: 117 14 QU 0252-12 R05

This is to certify the quality management systems of

**Shenzhen World Reputation Electronics Technology Co., LTD**

Organization code 30608924-7

Location 6F, Xingqiang Commercial Mansion, No. 1 Dezheng Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen

has been assessed and registered as meeting the requirements of  
**ISO9001:2008**

Scope of approval

**R&D, Production of Barcode Scanning Identification Equipment**

Signed by:

Approval Date: 26 Dec. 2014  
Expiry Date: 25 Dec. 2017

Wanghui Super Certification Assessment Service Co., Ltd.  
Certification and Assessment Services  
Central England Assessment Services Ltd. No. 1208  
Tel: +44 (0)1246 741100  
Fax: +44 (0)1246 741101  
Web: www.wanghui.com  
Add: Room 401, Changling Highway, 10000 West Changling Rd.  
Tianjin, Hebei, P.R. China 300171



The certificate information can be checked on the CNCA website: [WWW.CNCA.GOV.CN](http://WWW.CNCA.GOV.CN). The validation of the certificate also can be obtained through [www.iso-9001.com](http://www.iso-9001.com) or by calling ICAF Client Services Dept. This certificate is only valid when used together with related permits when appropriate. This certificate holder must successfully pass yearly periodical audits to maintain the validity of the certificate after the certificate approval date. The certificate holder has the property of CAS, so when it must be returned if the management system of the certificate holder is approved to fail to be in conformity with the certificate standard.



## CERTIFICATE OF REGISTRATION

Certificate No.: 117 14 E1 0796 R05

This is to certify the environmental management systems of

**Shenzhen World Reputation Electronics Technology Co., LTD**

Organization code 30608924-7

Location 6F, Xingqiang Commercial Mansion, No. 1 Dezheng Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen

has been assessed and registered as meeting the requirements of  
**GB/T24001-2004/ISO14001:2004**

Scope of approval

**The Related Environmental Management Activities of R&D, Production of Barcode Scanning Identification Equipment for Shenzhen World Reputation Electronics Technology Co., LTD Located in 6F, Xingqiang Commercial Mansion, No. 1 Dezheng Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen**

Signed by:

Approval Date: 26 Dec. 2014  
Expiry Date: 25 Dec. 2017

Wanghui Super Certification Assessment Service Co., Ltd.  
Certification and Assessment Services  
Central England Assessment Services Ltd. No. 1208  
Tel: +44 (0)1246 741100  
Fax: +44 (0)1246 741101  
Web: www.wanghui.com  
Add: Room 401, Changling Highway, 10000 West Changling Rd.  
Tianjin, Hebei, P.R. China 300171



The certificate information can be checked on the CNCA website: [WWW.CNCA.GOV.CN](http://WWW.CNCA.GOV.CN). The validation of the certificate also can be obtained through [www.iso-9001.com](http://www.iso-9001.com) or by calling ICAF Client Services Dept. This certificate is only valid when used together with related permits when appropriate. This certificate holder must successfully pass yearly periodical audits to maintain the validity of the certificate after the certificate approval date. The certificate holder has the property of CAS, so when it must be returned if the management system of the certificate holder is approved to fail to be in conformity with the certificate standard.



# Certificate of Compliance

Certificate Number: UN2014122403RC-3

**Applicant** : Shenzhen World Reputation Electronics Technology Co., Ltd.  
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,  
Shilong Community, Shiyao, Bao'an District, Shenzhen

**Manufacturer** : Shenzhen World Reputation Electronics Technology Co., Ltd.  
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,  
Shilong Community, Shiyao, Bao'an District, Shenzhen

**Product** : Bar-code Scanner

**Trade Name** : Yumite

**M/N** : YT-1000, YT-760, YT-760A, YT-760B, YT-M200, YT-1100A, YT-1100B, YT-M300, YT-2000, YT-2100A, YT-2100B, YT-M400, YT-XXXX

Test Standard: IEC62321:2013

The EUT described above has been consolidated by us and found in compliance with the council RoHS Directive 2011/65/EU. It is only valid in connection with the test report number: UN2014122403RR-3.

2014-12-24  
Date of issue

Shenzhen United Testing Technology Co., Ltd.  
Room 317-319, Block 1, University Town Technology Park,  
5<sup>th</sup> Zone, South Section, Hongqiang Industrial Park,  
Nanshan District, Shenzhen, P.R.C. 518055  
Tel: +86-755-86180096 Fax: +86-755-86180136  
<http://www.untt.com.cn> E-mail: [info@untt.com.cn](mailto:info@untt.com.cn)



# RoHS



# EC-R&TTE Certificate

Certificate Number: UN2014122403REC-1

**Applicant** : Shenzhen World Reputation Electronics Technology Co., Ltd.  
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,  
Shilong Community, Shiyao, Bao'an District, Shenzhen

**Manufacturer** : Shenzhen World Reputation Electronics Technology Co., Ltd.  
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,  
Shilong Community, Shiyao, Bao'an District, Shenzhen

**Product** : Bar-code Scanner

**Trade Name** : Yumite

**M/N** : YT-1300, YT-860, YT-1200, YT-1400, YT-1500, YT-2200, YT-2300, YT-2400, YT-2500, YT-XXXX

| Essential requirement | Applied Specifications/Standards | Documentary Evidence | Result |
|-----------------------|----------------------------------|----------------------|--------|
| Art.3.1(a) Health     | Not assessed                     |                      |        |
| Art.3.1(a) Safety     | EN60950-1                        | UN2014122403RR-1     | Pass   |
| Art.3.1(b) EMC        | ETSI EN301 489-1/3               | UN2014122403RR-1     | Pass   |
| Art.3.2 Radio         | ETSI EN300 440                   | UN2014122403RR-2     | Pass   |

The EUT described above has been tested by us with the listed standards and found in compliance with the council R&TTE directive 99/5/EC. It is possible to use CE marking to demonstrate the compliance with this Directive.

The scope of evaluation relates to the submitted documents only.

2014-12-24  
Date of issue

Shenzhen United Testing Technology Co., Ltd.  
Room 317-319, Block 1, University Town Technology Park,  
5<sup>th</sup> Zone, South Section, Hongqiang Industrial Park,  
Nanshan District, Shenzhen, P.R.C. 518055  
Tel: +86-755-86180096 Fax: +86-755-86180136  
<http://www.untt.com.cn> E-mail: [info@untt.com.cn](mailto:info@untt.com.cn)



# CE



## Our factory

# Yumite



