


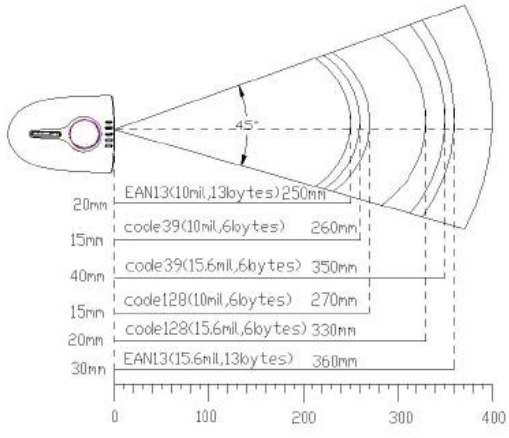
Aplicado no supermercado / livraria 2.4G wireless laser scanner de código de barras

Yumite



Specification

Yumite

Para	Model	YT-860														
Image																
Image																
Performance Parameter																
Depth Filed	 <table border="1"> <caption>Scanning Depth Field Data</caption> <thead> <tr> <th>Barcode Type</th> <th>Scanning Depth (mm)</th> </tr> </thead> <tbody> <tr> <td>EAN13(10mil,13bytes)</td> <td>250mm</td> </tr> <tr> <td>code39(10mil,6bytes)</td> <td>260mm</td> </tr> <tr> <td>code39(15.6mil,6bytes)</td> <td>350mm</td> </tr> <tr> <td>code128(10mil,6bytes)</td> <td>270mm</td> </tr> <tr> <td>code128(15.6mil,6bytes)</td> <td>330mm</td> </tr> <tr> <td>EAN13(15.6mil,13bytes)</td> <td>360mm</td> </tr> </tbody> </table>		Barcode Type	Scanning Depth (mm)	EAN13(10mil,13bytes)	250mm	code39(10mil,6bytes)	260mm	code39(15.6mil,6bytes)	350mm	code128(10mil,6bytes)	270mm	code128(15.6mil,6bytes)	330mm	EAN13(15.6mil,13bytes)	360mm
Barcode Type	Scanning Depth (mm)															
EAN13(10mil,13bytes)	250mm															
code39(10mil,6bytes)	260mm															
code39(15.6mil,6bytes)	350mm															
code128(10mil,6bytes)	270mm															
code128(15.6mil,6bytes)	330mm															
EAN13(15.6mil,13bytes)	360mm															
Wireless Transmitting Distance	Indoor	20-50M														
	Outdoor open environment	About300M														
Infrared induction distance	---															
Optical Source	650nm Visible red light diode															
Image Resolution	≥4mil															
Minimum Contrast	≥ 30%															
Decoding Capacity	UPC/EAN/JAN,UPC/EAN with supplementals, UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvarnrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes, e.g.China postal service code ,ect.															
Decoding Speed	100times/second															
Barcode Sensitivity	Tilt	±65°														
	Rotate	±42°														
	Deflection	±60°														
Data Interface	RJ-45															
Mechanical and Electric Performance																
Size(Length x Width x Height)	92.5×70×154.6 mm															
Weight	166g															
Indicator	Siren and LED light															
Battery Capacity	600mah															
Max.Power	350mw															
Working Voltage	DC5V															
Current	Max.Current	70ma														
	Working Current	65ma														
	Standbu Current	43ma														
	Sleeping Current	≤ 4ua														
Charging Current	450ma															
Accessory																
Data cable	Micro USB															
Wireless Receiver	2.4GHZ															
CD	---															
Operation Manual	1															
Charge station	---															
Environmental Parameter																
Storage Temperature	-40°C ~ 60°C															
Working Temperature	0°C ~ 50°C															
Relative Humidity	0 ~ 95%															
Height Range	1.5M															
IP Rating	IP52															
Certification																
CE, RoHS, EMC, LVD, ISO9001:2008, ISO14001:2004																



Certificate of Compliance

Certificate Number: UN2014122403RC-3

Applicant : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,
Shilong Community, Shiyan, Bao'an District, Shenzhen

Manufacturer : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,
Shilong Community, Shiyan, Bao'an District, Shenzhen

Product : Bar-code Scanner

Trade Name : Yumite

M/N : YT-1000, YT-760, YT-760A, YT-760B, YT-M200, YT-1100A, YT-1100B, YT-
M300, YT-2000, YT-2100A, YT-2100B, YT-M400, YT-XXXX

Test Standard: IEC62321:2013

The EUT described above has been consolidated by us and found in compliance with the council
RoHS Directive 2011/95/EU. It is only valid in connection with the test report number:
UN2014122403RR-3.

2014-12-24

Date of issue

Shenzhen United Testing Technology Co., Ltd.
Room 317-319, Block 1, University Town Technology Park,
5th Zone, South Section, Hongshuang Industrial Park,
Nanman District, Shenzhen, PRC. 518055
Tel: +86-755-88130696 Fax: +86-755-88180138
<http://www.lni.com.cn> E-mail: info@lnt.com.cn



RoHS



EC-R&TTE Certificate

Certificate Number: UN2014122403REC-1

Applicant : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,
Shilong Community, Shiyan, Bao'an District, Shenzhen

Manufacturer : Shenzhen World Reputation Electronics Technology Co., Ltd.
6F, B Building, B Area, Xingqiang Business Building, No.1, Dezheng Road,
Shilong Community, Shiyan, Bao'an District, Shenzhen

Product : Bar-code Scanner

Trade Name : Yumite

M/N : YT-1300, YT-860, YT-1200, YT-1400, YT-1600, YT-2200, YT-2300, YT-2400,
YT-2500, YT-XXXX

Essential requirement	Applied Specifications/Standards	Documentary Evidence	Result
Art.3.1(a) Health	Not assessed		
Art.3.1(a) Safety	EN60950-1	UN2014122403RR-1	Pass
Art.3.1(b) EMC	ETSI EN301 489-1/3	UN2014122403RR-1	Pass
Art.3.2 Radio	ETSI EN300 440	UN2014122403RR-2	Pass

The EUT described above has been tested by us with the listed standards and found in compliance
with the council R&TTE directive 99/5/EC. It is possible to use CE marking to demonstrate the
compliance with this Directive.

The scope of evaluation relates to the submitted documents only.

2014-12-24

Date of issue

Shenzhen United Testing Technology Co., Ltd.
Room 317-319, Block 1, University Town Technology Park,
5th Zone, South Section, Hongshuang Industrial Park,
Nanman District, Shenzhen, PRC. 518055
Tel: +86-755-88130696 Fax: +86-755-88180138
<http://www.lni.com.cn> E-mail: info@lnt.com.cn



CE



Application

Yumite



