Automatische Handheld Mini CCD Barcodemodul mit Micro-USB-Lieferanten aus China

Para / Model		YT-M301
Image		
Image		
Performance Parameter		
Depth Filed		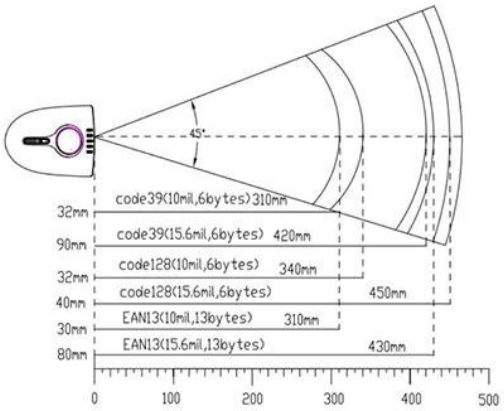
Wireless Transmitting Distance (without barrier)		——
Infrared induction distance		150 - 200mm
Optical Source		620nm Visible red light diode
Imaging Sensor		CCD
Image Resolution		2500Pixel
Reading Precision		≥ 5mil
Minimum Contrast		≥ 30%
Decoding Capacity		Code128, EAN-13, EAN-8, Code39,UPC-A, UPC-E, Codabar, Interleaved 2 of 5,ISBN, Code 93, UCC/EAN-128, GS1 Databar, ect.
Decoding Speed		280times/second
Barcode Sensitivity	Tilt	±55°
	Rotate	±25°
	Deflection	±75°
Data Interface		micro usb
Mechanical and Electricl Performance		
Size(Length x Width x Height)		50×37.3×21.7 mm
Weight		27g
Indicator		Siren and LED light
Battery Capacity		——
Max.Power		700mw
Working Voltage		DC5V
Current	Max.Current	140ma
	Working Current	90ma
	Standby Current	45ma
	Sleeping Current	——
Charging Current		——
Accessory List		
Data Cable		Micro USB
		——
Wireless Receiver		——
CD		——
Operation Manual		1
Charge Station		——
Enironmental Parameter		
Storage Temperature		-40°C ~ 60°C
Working Temperature		0°C ~ 50°C
Relative Humidity		0 ~ 95%
Height Range		1.5M
IP Rating		IP52
Certification		
CE,RoHS,EMC,LVD，ISO9001:2008,ISO14001:2004		