


Wireless Pocket CCD Scanner, Bluetooth Barcode Scanner, Mini Bluetooth Barcode Reader YT-1402-MA

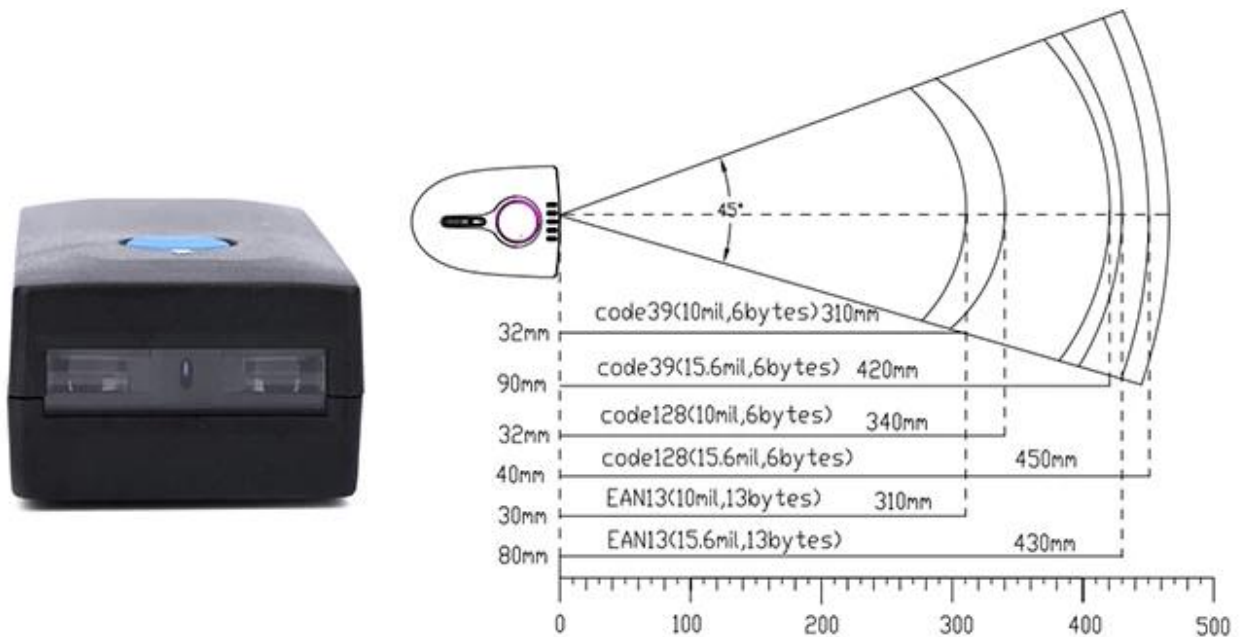

YT1402-MA Mini Bluetooth wireless CCD barcode scanner is a small, light weight device. It ergonomically designed for portable use. With hand size design allow users easy carry in the workplace.

Use 1D barcode scanning solutions with red LED barcode scanning patent. Adopt 620nm red light CCD imaging technology and intelligent image identification system. Integrated high performance processor and decoding board, has fast decoding and high-precision reading ability, and high anti-interference ability.

It can easily read barcodes on paper, goods and other media, even the barcodes on LCD display.

Features

- Stylish and compact design
- Mobility application by wireless data collection and transmit
- Support HID and SPP connection
- Low power consumption for long time mobile application
- Build in 280 scans/sec high performance CCD module
- Easy to integrate with host (Smart phone, Tablet & Laptop)
- Inventory mode for out-of-range reading

Wireless transmitting distance (without barrier)		15 - 20M
Infrared induction distance		—
Optical Source		620nm Visible red light diode
Imaging Sensor		CCD
Image Resolution		2500 Peixel
Reading Precision		≥ 5mil
Minimum Contrast		≥ 30%
Decoding Capacity		Code128, EAN-13, EAN-8, Code39,UPC-A, UPC-E, Codabar, Interleaved 2 of 5,ISBN, Code 93, UCC/EAN-128, GS1 Databar, ect.
Decoding Speed		280times/second
Barcode Sensitivity	Tilt	±55°
	Rotate	±25°
	Deflection	±75°
Data Interface		micro usb
Mechanical and Electric Performance		
Size(Length x Width x Height)		75.4×38.5×26 mm
Weight		61g
Indicator		Siren and LED light
Battery Capacity		600mah
Max. Power		750mw
Worrking Voltage		DC5V
Current	Max. Current	150ma
	Working Current	90ma
	Standby Current	68ma
	Sleeping Current	3ua
Charging Current		450ma
Accessory List		
Data Cable		Micro USB
Wireless Receiver		Bluetooth
CD		1
Operation Manual		1
Environment Parameter		
Storage Temperature		-40°C ~ 60°C
Working Temperature		0°C ~ 50°C
Relative Humidity		0 ~ 95%)
Height Range		1.5M
IP Rating		IP52
Certification		
CE, RoHS, EMC, LVD, ISO9001:2000, ISO14001:2004		



Multi-angle





CUSTOMER

Customer visit



Our customers came to Yumite company to visit and field trips, they are satisfied with our quality and service.



CERTIFICATES



**SERVICE**

Professional and patient pre-sale and after-sale service on our products;

**COOPERATION**

Stable quality and reasonable price for you to gain long term cooperation;

**OEM&ODM**

OEM & ODM service for quantity orders;

**QUALITY**

Sample orders welcomed for quality test;

**WARRANTY**

Minimum warranty of one year for free.

**How about the quality of the products?**

There are CE/ROHS/FCG/IEC/IP52/MSDS/UN38.2/LVD/ISO9001/ISO14001 certifications and reports.

**What's the payment way?**

We accept Paypal, T/T, L/C, Western Union, MoneyGram.

**What's the shipping way?**

There are DHL, Fedex, TNT, UPS.(We also can ship the goods by your shipping account or other express agent you provided).

**How long can I get the products?**

Within seven working days.

**How about the after-sales service?**

Our product are warranted against manufacturing defects in materials for a period of one year and workmanship for a period two years from date of Manufacture under normal use. Lifetime maintenance for setting use.

